


# SafeLink AIS SART2

The SafeLink AIS SART2 is a manual deployment survival craft AIS Search and Rescue Transmitter (AIS SART), intended for use on life rafts or survival craft. It meets IMO SOLAS requirements and is a replacement for legacy radar SARTs.

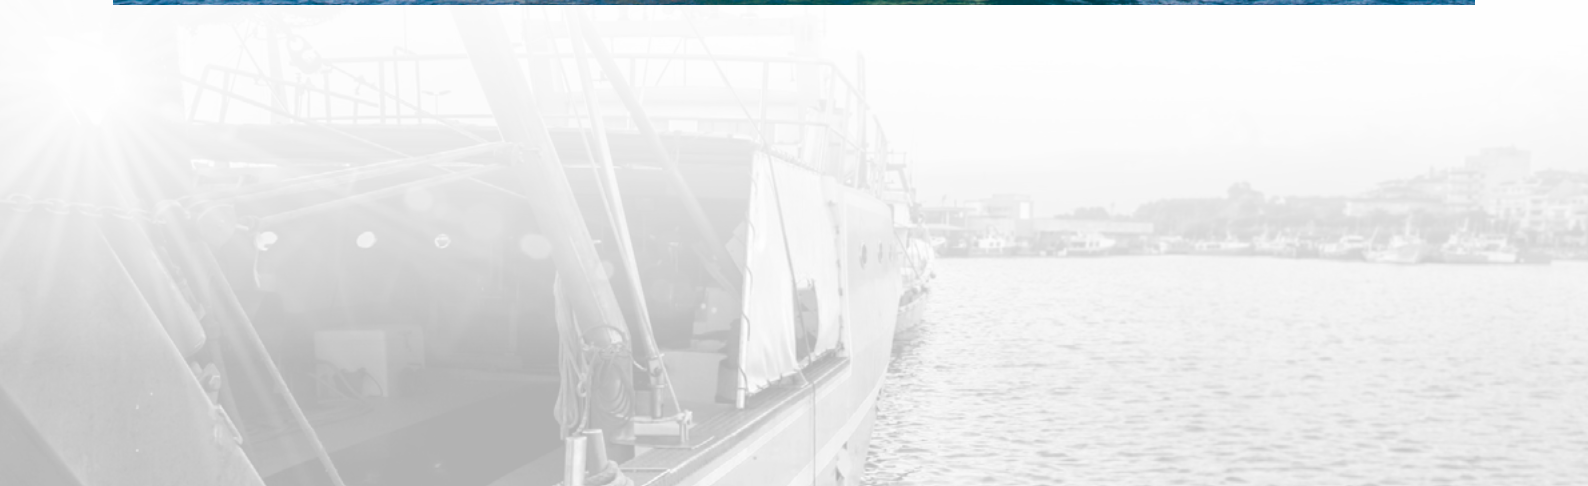

# SafeLink AIS SART2

Compact, easy to operate and deploy, the SafeLink AIS, Search and Rescue locating device is a portable transponder packed inside a quick release carry off bag.

SafeLink AIS SART2 transmits target survivor information including structured alert messages, GPS position information and serialised identity number. Once activated the SafeLink AIS SART2 transmits continually for a minimum of 96 hours. An inbuilt high precision GNSS receiver provides accurate position information to assist in quick location of survival craft.

Whether wall mounted in the ships bridge or packed inside a survival craft, the highly visible and buoyant carry case affords maximum protection.

- Internationally approved
- Ship or Survival craft options
- Waterproof to 10m
- Buoyant/floats
- Rugged, compact and lightweight
- Minimum 96 hour operational battery life
- 6 year battery life
- Visual indication of operation
- Built-in test facility
- Mounting options — Internal/External
- Transmits GPS coordinates
- Interoperability with AIS Users
- Telescopic Mounting Pole included
- Comes with protective carry off bag

## Technical Specifications

Beacon Specification Standards applied

<b>APPLICABLE STANDARDS</b>	IEC 61097-14 Ed.1 (2010)
	IEC 60945 Ed. 4 (2002) incl. Corrigendum 1 (2008)
	IMO Resolution A.694 (17)
	IMO Resolution MSC.246 (83)
	IMO Res. MSC.302 (87)*

ITU-R M.1371-5 (2014)  
 \*: This covers Bridge Alert Management and it is not applicable for AIS

<b>VHF TRANSMITTER</b>	Operating Frequency	AIS 1, 161.975MHz AIS 2, 162.025MHz
	Data Rate	9,600bps
	Bandwidth	25 KHz
	Power Output	1W EIRP
	AIS Message Type	Message 1, Message 14
	Modulation	GMSK
	Antenna	Integrated by PCB
<b>GNSS RECEIVER</b>	Receiving Channels	48 channels
	Acquisition Sensitivity	(-)159 dBm
	Tracking Sensitivity	(-)159 dBm
	Position Accuracy	< 2.5 m Autonomous & SBAS
<b>BATTERY</b>	Type	Primary Lithium (not rechargeable)
	Operating Life	96 hours minimum
	Storage	6 years
	Service	Replaceable
<b>CARRY &amp; MOUNTING</b>	Carry Bag	
	Wall Mount	
<b>ENVIRONMENT</b>	Operating temperature	-20°C to +55°C
	Storage temperature	-30°C to +70°C
	Waterproof	Immersion to 10m
	Buoyancy	Floats
	Exterior Finish	Highly visible Yellow
	Compass safe distance	Standard Magnetic — 0.60m Steering Magnetic — 0.40m

<b>PHYSICAL</b>	Max Diameter (Main Body)	70 mm
	Length (Main Body)	300 mm
	Weight (Main Body)	283g (Battery included)
	Length (Pole)	1050mm (Extended)
	Weight (Pole)	300g
	Total Weight (Storage Package)	1.08kg

